


eBOX620-823-FL


Fanless Embedded System with Intel® Atom™ Processor Z510PT/ Z520PT

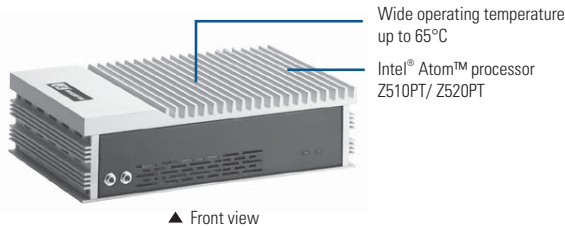

▲ Front view

Features

- Intel® Atom™ processor Z510PT/ Z520PT onboard
- Intel® SCH US15WPT chipset with I/O controller
- Supports wide operating temperature of -40°C ~ +65°C
- Fanless operation design with full feature I/O
- One 2.5" SATA HDD drive bay and 1 CompactFlash™ slot
- Supports Jumbo Frame (9k), WoL, PXE Remote Boot

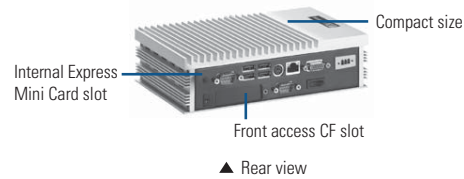

Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	Intel® Atom™ processor Z510PT 1.1 GHz or Z520PT 1.33 GHz
System Memory	1 x 200-pin DDR2 SO-DIMM max. up to 2 GB
Chipset	Intel® SCH US15WPT
BIOS	AMI 8Mbit with RPL/PXE LAN boot ROM
System I/O Outlet	2 x RS-232 (COM 1/2) 1 x VGA 1 x Audio (Mic-in/Line-out) 1 x PS/2 keyboard/mouse 1 x 10/100/1000Mbps Ethernet (Intel® 82574IT) 4 x USB 2.0 1 x SMA type connector opening for Antenna 1 x VDC power input connector 1 x ATX power switch
Watchdog Timer	255 levels, 1 ~ 255 sec.
Storage	1 x 2.5" SATA HDD drive bay 1 x CompactFlash™ slot
Expansion Interface	1 x PCI Express Mini Card slot (USB signal)
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Power Supply	36W 12V ~ 24VDC
Operating Temperature	-40°C ~ +65°C (-40°F ~ +149°F) (with 1.33 GHz CPU, W.T. CF) -40°C ~ +60°C (-40°F ~ +140°F) (with 1.33 GHz CPU, W.T. HDD)
Storage Temperature	-45°C ~ +80°C (-49°F ~ +176°F)
Humidity	10% ~ 90% , non-condensing
Vibration Endurance	2 Grms with CF (5 ~ 500 Hz, X, Y, Z directions)
Dimensions	200 mm (7.87") (W) x 120 mm (4.72") (D) x 56 mm (2.2") (H)
Weight (net/gross)	1.8 kg (3.97 lb)/2.6 kg (5.73 lb)
Certification	CE
EOS Support	XPE, WinCE, Linux, WES

- * XPE: Windows® XP Embedded
- * WES: Windows® XP Embedded Standard
- * WES7: Windows® Embedded Standard 7
- * WES8: Windows® Embedded Standard 8

Packing List

- 1 x quick manual
- 1 x driver CD
- 1 x Y cable for PS/2 keyboard/mouse
- 1 x screw pack
- 4 x foot pad
- 2 x CF mylar
- 1 x HDD mylar
- 1 x DC-in connector

* All specifications and photos are subject to change without notice.
© 2014 Axiomtek Co., Ltd. All rights reserved.

Power Protection

DC Version

- EMI suppression filter
- OVP (over voltage protection)
- UVP (under voltage protection)
- OCP (over current protection)
- OTP (over temperature protection)
- Reverse protection

Ordering Information

Standard	
eBOX620-823-FL-1.3 G	Fanless embedded system with Intel® Atom™ processor Z520PT 1.33 GHz (-40°C ~ +65°C)
eBOX620-823-FL-1.1 G	Fanless embedded system with Intel® Atom™ processor Z510PT 1.1 GHz (-40°C ~ +65°C)

Optional

- 2.5" SATA HDD 40 GB or above
- 2.5" SATA SSD 4 GB or above
- DDR2 SODIMM 256 MB ~ 2 GB
- Compact flash 256 MB or above
- Din rail kit
- Wall mount kit
- VESA mount kit

*Specifications and certifications are based on options and may vary.
**This product contains antenna or related module defaultly.

Dimensions

