


eBOX622-831-FL

Fanless Embedded System with Intel® Atom™ N270 1.6 GHz Processor, Intel® 945GSE + ICH7M Chipset and 6 RS-232



▲ Front view



▲ Rear view



Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	Intel® Atom™ processor N270 1.6 GHz
System Memory	1 x 200-pin DDR2 SO-DIMM max. up to 2 GB
Chipset	Intel® 945GSE + ICH7M
BIOS	AMI 8Mbit with RPL/PXE LAN boot ROM
System I/O Outlet	6 x RS-232 (COM 1 ~ 6, optional COM 2 as RS-485) 1 x VGA 1 x Audio (Mic-in/Line-out) 1 x PS/2 keyboard/mouse 2 x 10/100/1000Mbps Ethernet (Realtek RTL8111B) 4 x USB 2.0 1 x VDC power input connector 1 x ATX power switch
Watchdog Timer	255 levels, 1 ~ 255 sec.
Storage	1 x 2.5" SATA HDD drive bay 1 x CompactFlash™ slot
Expansion Interface	N/A
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Power Supply	Screw type AC 60W adapter Input: AC 90 ~ 264V Output: DC12V @ 5A
Operating Temperature	-10°C ~ +50°C (14°F ~ 122°F) (with 1.6 GHz CPU, W.T. HDD)
Storage Temperature	-20°C ~ +80°C (-4°F ~ +176°F)
Humidity	10%~90% , non-condensing
Vibration Endurance	2 Grms w/ CF (5-500Hz, X, Y, Z directions)
Dimensions	200 mm (7.87") (W) x 120 mm (4.72") (D) x 75 mm (2.95") (H)
Weight (net/gross)	1.9 kg (4.19 lb)/2.7 kg (5.95 lb)
Certification	CE
EOS Support	XPE, WinCE, Linux, WES, WES7

* XPE: Windows® XP Embedded

* WES: Windows® XP Embedded Standard

* WES7: Windows® Embedded Standard 7

* WES8: Windows® Embedded Standard 8

Packing List

- 1 x quick manual
- 1 x driver CD
- 1 x Y cable for PS/2 keyboard/mouse
- 1 x screw pack
- 4 x foot pad
- 1 x power adapter
- 2 x CF mylar
- 1 x HDD mylar
- 1 x power cord

Features

- Intel® Atom™ processor N270 1.6 GHz onboard
- Intel® 945GSE + ICH7M chipset
- Supports 6 RS-232 ports (optional 1 RS-232/422/485)
- Fanless operation design with full feature I/O
- One 2.5" SATA drive bay
- Watchdog Timer

Power Protection

AC Version

OVP (over voltage protection)

OCP (over current protection)

SCP (short circuit protection)

Ordering Information

Standard

eBOX622-831-FL1.6G Fanless embedded system with Intel® Atom™ processor N270 1.6 GHz, VGA, AC 60W adapter, CF & HDD support and 6 RS-232

eBOX622-831-FL1.6G-485 Fanless embedded system with Intel® Atom™ processor N270 1.6 GHz, VGA, AC 60W adapter, CF & HDD support, 5 RS-232 and 1 RS-485

eBOX622-831-FL w/o adapter Fanless embedded system with Intel® Atom™ processor N270 1.6 GHz, VGA, CF & HDD support, 6 RS-232 and w/o adapter

Optional

2.5" SATA HDD 40 GB or above

2.5" SATA SSD 4 GB or above

DDR2 SODIMM 256 MB ~ 2 GB

CompactFlash™ 256 MB or above

Din rail kit


Wall mount kit

VESA mount kit

Power Cord

*Specifications and certifications are based on options and may vary.

Dimensions

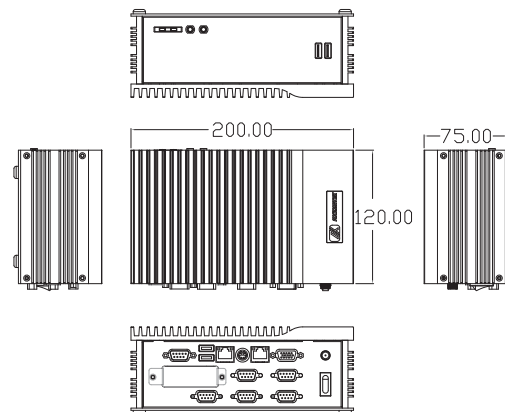

* All specifications and photos are subject to change without notice.