


eBOX830-831-FL

Fanless Embedded System Featuring
Socket M Intel® Core™2 Duo Processor
up to 1.5 GHz and PCI Slot

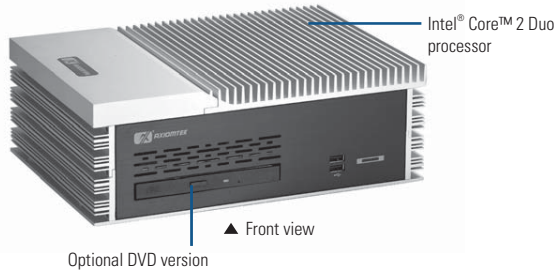

Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP30
CPU	Socket M for Intel® Core™2 Duo/ Celeron® M 1.5 GHz (L7400) processor
System Memory	2 x 240-pin DDR2 DIMM max. up to 4 GB (The actual max capacity will be less depending on system configuration.)
Chipset	Intel® 945GME + ICH7M/-DH
BIOS	Phoenix-Award 4 Mbit with RPL / PXE LAN Boot ROM SmartView and customer CMOS backup
System I/O Outlet	3 x RS-232 (COM 2/3/4) 1 x RS-232/422/485 (COM 1) 1 x VGA 2 x IEEE 1394a 1 x Audio (Mic-in/Line-out) 2 x PS/2 keyboard/mouse 2 x 10/100/1000Mbps Ethernet (Realtek RTL8111B) 6 x USB 2.0 1 x VAC 100 ~ 240 power input connector
Watchdog Timer	255 levels, 1 ~ 255 sec.
Storage	1 x 2.5" SATA HDD drive bay
Expansion Interface	1 x PCI slot (Supports max. length of 185 mm of PCB boards expansion)
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Power Supply	AC90 ~ 264V, 120W power supply or 10 ~ 30V 120W DC power supply
Operating Temperature	0°C ~ +45°C (32°F ~ +113°F) (with W.T. HDD)
Storage Temperature	-20°C ~ +80°C (-4°F ~ +176°F)
Humidity	10% ~ 90%, non-condensing
Vibration Endurance	1 Grms with HDD (5 ~ 500 Hz, X, Y, Z directions)
Dimensions	300 mm (11.81") (W) x 210 mm (8.27") (D) x 104.5 mm (4.11") (H)
Weight (net/gross)	6.3 kg (13.89 lb)/8.2 kg (18.08 lb)
Certification	CE
EOS Support	XPE, WinCE, Linux, WES

- * XPE: Windows® XP Embedded
- * WES: Windows® XP Embedded Standard
- * WES7: Windows® XP Embedded Standard 7
- * WES8: Windows® XP Embedded Standard 8


Packing List

- 1 x quick manual
- 1 x driver CD
- 1 x screw pack
- 4 x foot pad
- 4 x HDD anti-vibration damper

* All specifications and photos are subject to change without notice.
© 2014 Axiomtek Co., Ltd. All rights reserved.

Features

- Socket M for Intel® Core™2 Duo or Celeron® M processor up to 1.5 GHz
- Intel® 945GME + ICH7M/-DH chipset
- High performance with full feature I/O
- Supports PCI interface or optical drive
- Supports 6 USB 2.0 ports and 4 COM ports
- Supports 2 10/100/1000Mbps Ethernet ports
- Supports 2 IEEE 1394a ports
- One 2.5" SATA HDD drive bay
- 120W AC or DC power supply



Power Protection

AC & DC Version

OLD (over load protection) SCP (short circuit protection)

Ordering Information

Standard


eBOX830-831-FL-AC	Fanless embedded system supports socket M for Intel® Celeron® M processor, 4 COM, 6 USB, PCI slot and AC power
eBOX830-831-FL-AC-DVD	Fanless embedded system supports socket M for Intel® Celeron® M processor, 4 COM, 6 USB, DVD-ROM and AC power
eBOX830-831-FL-1.5G-AC	Fanless embedded system with LV Intel® Core™2 Duo 1.5 GHz (L7400) processor, 4 COM, 6 USB, PCI slot and AC power
eBOX830-831-FL-1.5G-AC-DVD	Fanless embedded system with LV Intel® Core™2 Duo 1.5 GHz (L7400) processor, 4 COM, 6 USB, DVD-ROM and AC power
eBOX830-831-FL-DC	Fanless embedded system supports socket M for Intel® Celeron® M processor, 4 COM, 6 USB, PCI slot and DC power
eBOX830-831-FL-DC-DVD	Fanless embedded system supports socket M for Intel® Celeron® M processor, 4 COM, 6 USB, DVD-ROM and DC power

Optional

2.5" SATA HDD	40 GB or above
2.5" SATA SSD	4 GB or above
DDR2 DIMM	256 MB ~ 2 GB
Power cord	

*Specifications and certifications are based on options and may vary.

Dimensions

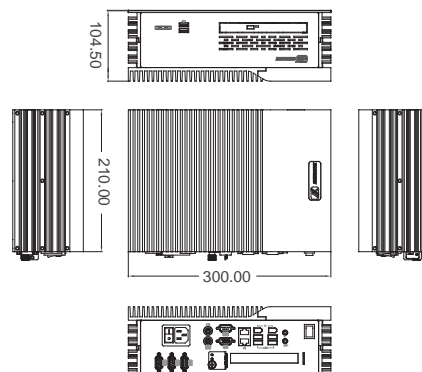

axiomtek.com

Overview

Embedded Systems

Embedded Systems for Transportation

Embedded Field Controllers

Embedded MicroBoxes

Industrial Barebone Systems

Industrial Chassis

Backplanes

Power Supplies

Peripherals & Accessories