
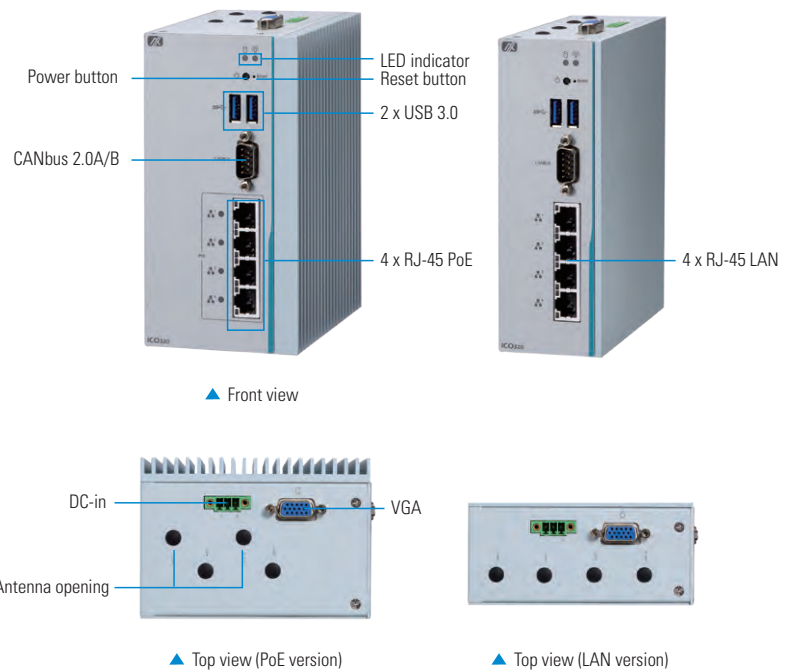


ICO320-83C

Robust DIN-rail Fanless Embedded System with Intel® Celeron® Processor N3350, COM, CAN, PoE LAN and DIO

Features

- Cost-effective with fanless and cableless design
- Intel® Celeron® processor N3350 processor, reliable F1 stepping version CPU
- 4 RJ-45 Gigabit PoE ports
- 8-bit programmable DIO for IoT gateway applications
- Wide operating temperature range from -40°C to +70°C
- 12 to 24 VDC wide range power input
- Supports SocketCAN
- AMS.AXView intelligent remote monitoring software for IIoT

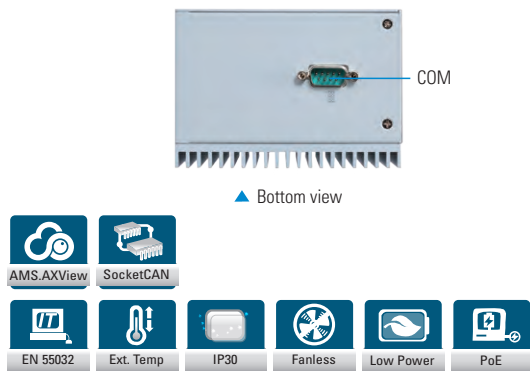

Specifications

Standard Color	Silver																
Construction	Aluminum extrusion and heavy-duty steel, IP30																
CPU	Intel® Celeron® N3350 2C @1.1 GHz, TDP: 6W																
Chipset	SoC integrated																
System Memory	1 x DDR3L-1866 SO-DIMM slot, up to 8GB																
BIOS	AMI																
TPM	TPM 2.0																
System I/O Outlet	<table> <tr> <td>Serial</td><td>1 x DB9 serial console or RS-232/422/485</td></tr> <tr> <td>Display</td><td>1 x VGA</td></tr> <tr> <td>USB</td><td>2 x USB 3.0</td></tr> <tr> <td>Ethernet</td><td>4 x RJ-45 isolated* 10/100/1000 Mbps Ethernet (Intel® i211-AT) *isolation voltage: 1.5 kV</td></tr> <tr> <td>PoE</td><td>PoE power output max. 30W 802.3af class 2, 7.5W, max. 4 ports 802.3af class 3, 15.4W, max. 2 ports 802.3at class 4, 30W, max. 1 port</td></tr> <tr> <td>DIO</td><td>1 x DB9 8-bit programmable DIO</td></tr> <tr> <td>CAN</td><td>1 x DB9 CANBus 2.0 A/B, supports SocketCAN</td></tr> <tr> <td>Others</td><td>4 x Antenna opening</td></tr> </table>	Serial	1 x DB9 serial console or RS-232/422/485	Display	1 x VGA	USB	2 x USB 3.0	Ethernet	4 x RJ-45 isolated* 10/100/1000 Mbps Ethernet (Intel® i211-AT) *isolation voltage: 1.5 kV	PoE	PoE power output max. 30W 802.3af class 2, 7.5W, max. 4 ports 802.3af class 3, 15.4W, max. 2 ports 802.3at class 4, 30W, max. 1 port	DIO	1 x DB9 8-bit programmable DIO	CAN	1 x DB9 CANBus 2.0 A/B, supports SocketCAN	Others	4 x Antenna opening
Serial	1 x DB9 serial console or RS-232/422/485																
Display	1 x VGA																
USB	2 x USB 3.0																
Ethernet	4 x RJ-45 isolated* 10/100/1000 Mbps Ethernet (Intel® i211-AT) *isolation voltage: 1.5 kV																
PoE	PoE power output max. 30W 802.3af class 2, 7.5W, max. 4 ports 802.3af class 3, 15.4W, max. 2 ports 802.3at class 4, 30W, max. 1 port																
DIO	1 x DB9 8-bit programmable DIO																
CAN	1 x DB9 CANBus 2.0 A/B, supports SocketCAN																
Others	4 x Antenna opening																
Expansion Interface	1 x half-size Rev.1.2 PCI Express Mini Card slot: mSATA/USB/PCIe 1 x full-size Rev.1.2 PCI Express Mini Card slot: USB/PCIe with SIM socket																
Storage	SATA Drive 1 x mSATA (occupied 1 x PCI Express Mini Card slot) 1 x Internal 2.5" SATA drive (9.5 mm height)																
Watchdog Timer	255 levels, 1 to 255 sec.																

Power	Power Supply 1 x DC power input with terminal block
	Power PoE SKU**: 12-24Vdc, 4.05-2.05A
	Consumption LAN SKU**: 12-24Vdc, 1.6-0.81A
PoE (PSE, Power Sourcing Equipment)*	4 x RJ-45 PoE, output max. 30W supports PoE & PoE+ • PoE (802.3af 15.4W/port) • PoE+ (802.3at 30W/port)
System Indicator	1 x LED indicator for SATA drive activity 1 x LED indicator for power
Operating Temperature	-40°C to +70°C (-40°F to +158°F) with W.T. peripheral***
Humidity	0% to 95%, non-condensing
Vibration Endurance	2 Gms with storage (5 to 500Hz, X/Y/Z direction; random, operating)
Dimensions	PoE SKU**: 77 mm (3.03") (W) x 110 mm (4.33") (D) x 155 mm (6.1") (H) LAN SKU**: 48 mm (1.88") (W) x 110 mm (4.33") (D) x 155 mm (6.1") (H)
Weight (net/gross)	PoE SKU**: 1.2 kg (2.2 lb)/1.70 kg (3.3 lb) LAN SKU**: 1.0 kg (2.2 lb)/1.50 kg (3.3 lb)
Certifications	CE (Class A), FCC (Class A) compliant
EMC	CE/FCC EN 55032 (Class A), EN 55024, FCC part 15 B (Class A)
EOS Support	Windows® 10 IoT, Linux
Software Support	AMS.AXView

* For PoE SKU

** See ordering info

*** Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Ordering Information

Standard	
IC0320-83C-N3350-4POE-CAN-WT-DC (P/N: E22C320106)	Robust DIN-rail fanless embedded system with Intel® Celeron® processor N3350 (1.1GHz), 1 COM, 4 RJ-45, PoE, GbE LAN, 2 USB, VGA, CAN, operating temperature from -40°C to70°C, TPM 2.0 reserved, and SocketCAN supported
	PoE SKU
IC0320-83C-N3350-4LAN-COM-CAN-WT-DC (P/N: E22C320107)	Robust DIN-rail fanless embedded system with Intel® Celeron® processor N3350 (1.1GHz), 1 COM, 4 RJ-45, GbE LAN, 2 USB, VGA, CAN, operating temperature from -40°C to70°C, TPM 2.0 reserved, SocketCAN supported
	Non-PoE LAN SKU

* Specifications and certifications may vary based on different requirements.

Optional	
Communication Modules	8812C300GA0E 3G UC20GKit tBOX/ICO (20) (E)
	8812C300HA0E 3G/GPS UC20GKit tBOX/ICO (20) (E)
	8812C1200A0E AP12356 Wi-Fi kit for tBOX/ICO (E)
	8812C1201A0E AP12356 WT Wi-Fi kit for tBOX/ICO (E)
	8812C300IA0E LTE SIM7100JC kit for ICO (20) JPN SFP (E)
	8812C300EA0E LTE SIMCOM SIM7100C (TW) for ICO300 SFP (E)
AC to DC Adapter	8812C300DA0E LTE SIMCOM SIM7100E (EU) for ICO300 SFP (E)
	50906D24000E Adapter 24V/120W, wire only, FSP120-AAAN3

* Specifications and certifications may vary based on different requirements.

Dimensions

