

# NPort® 6600 Series

**8/16/32-port RS-232/422/485 rackmount terminal servers**



- > Up to 32 ports for high density environments
- > Non-standard baudrates supported with high precision
- > Port buffers for storing serial data when the Ethernet is off-line
- > Supports IPv6
- > Ethernet redundancy (STP/RSTP/Turbo Ring) with network module
- > Modular design for scalability
- > DES/3DES/AES for highly secure data transmissions



## Overview

The NPort® 6600 series of secure device servers is the right choice for applications that use large numbers of serial devices packed into a small space. Security breaches are intolerable and the NPort® 6600 ensures data transmission integrity with support of EDS, 3DES,

and AES encryption algorithms. Serial devices of any type can be connected to the NPort® 6600, and each serial port on the NPort® can be configured independently for RS-232, RS-422, or RS-485 transmission.

## LCD Panel Makes Configuration Easy

The NPort® 6600 has a built-in LCD panel for configuration. The panel displays the server name, serial number, and IP address, and any of the device server's configuration parameters, such as IP address, netmask, and gateway address, can be updated easily and quickly.




**Note:** The LCD panel is only available with standard temperature models.

## Adjustable Resistor Values for RS-485 Communication

The NPort® 6600 provides adjustable termination, pull high, and pull low resistors for RS-485 communication. In some critical environments, termination resistors may be needed to prevent the reflection of serial signals, and the pull high and pull low resistors may

need adjusting to maintain the integrity of the electrical signal. Since no set of resistor values works for every environment, the NPort® 6600 allows manual adjustment of the resistor values for each serial port using built-in DIP switches.

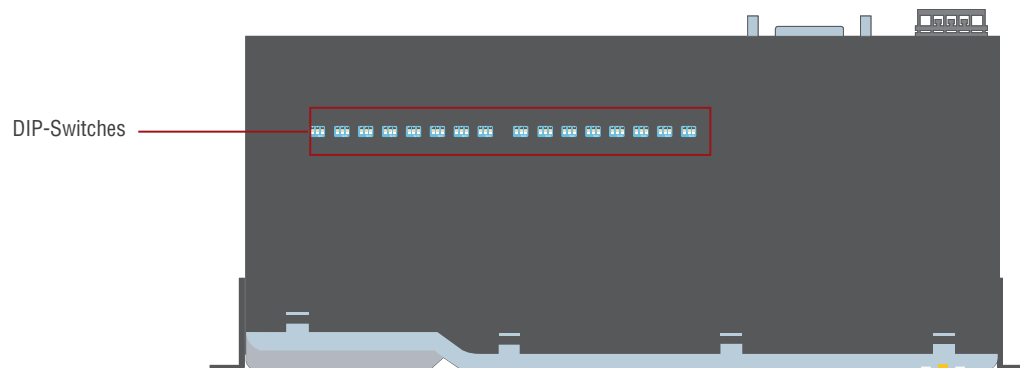

## Specifications

### Ethernet Interface

**Number of Ports:** 1

**Speed:** 10/100 Mbps, auto MDI/MDIX

**Connector:** 8-pin RJ45

**Magnetic Isolation:** 1.5 KV built-in

### Optical Fiber Interface (with network module)

	100BaseFX	
	Multi-mode	Single-mode
Wavelength	1300 nm	1310 nm
Max. TX	-14 dBm	0 dBm
Min. TX	-20 dBm	-5 dBm
RX Sensitivity	-32 dBm	-34 dBm
Link Budget	12 dB	29 dB
Typical Distance	5 km <sup>a</sup> 4 km <sup>b</sup>	40 km <sup>c</sup>
Saturation	-6 dBm	-3 dBm

a. 50/125 μm, 800 MHz\*km fiber optic cable

b. 62.5/125 μm, 500 MHz\*km fiber optic cable

c. 9/125 μm, 3.5 PS/(nm\*km) fiber optic cable

### Serial Interface

**Number of Ports:** 8, 16, or 32

**Serial Standards:**

NPort 6610: RS-232

NPort 6650: RS-232/422/485

**Connector:** 8-pin RJ45

**RS-485 Data Direction Control:** ADDC® (Automatic Data Direction Control)

**Serial Line Protection:** 15 KV ESD protection for all signals

**Console Port:** Dedicated RS-232 console port on rear panel (8-pin RJ45)

### Serial Communication Parameters

**Data Bits:** 5, 6, 7, 8

**Stop Bits:** 1, 1.5, 2

**Parity:** None, Even, Odd, Space, Mark

**Flow Control:** RTS/CTS, DTR/DSR, XON/XOFF

**Baudrate:** 50 bps to 921.6 Kbps (supports non-standard baudrates)

**Pull High/Low Resistor for RS-485:** 1 KΩ, 150 KΩ

**Terminator for RS-485:** 120 Ω

### Serial Signals

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

**RS-422:** Tx+, Tx-, Rx+, Rx-, GND

**RS-485-4w:** Tx+, Tx-, Rx+, Rx-, GND

**RS-485-2w:** Data+, Data-, GND

### Memory Expansion Slot

**Slot Type:** SD socket (supports up to 2 GB)

### Software

**Network Protocols:** ICMP, IP, TCP, UDP, DHCP, BOOTP, Telnet, DNS, SNMP V1/V2c/V3, HTTP, SMTP, ARP, PPPoE

**Security Protocols:** DES, 3DES, AES, SSH, SSL

**Configuration Options:** Web Console, Serial Console, Telnet Console, Windows Search Utility

**Windows Real COM Drivers:** Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7 x86/x64, Embedded CE 5.0/6.0, XP Embedded

**Fixed TTY Drivers:** SCO Unix, SCO OpenServer, UnixWare 7, UnixWare 2.1, SVR 4.2, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x

**Linux Real TTY Drivers:** Linux kernel 2.4.x, 2.6.x, 3.0.x

**Management:** SNMP MIB-II

**IP Routing:** Static, RIP-I, RIP-II

### Operation Modes

**Standard:** Real COM, TCP Server, TCP Client, UDP, Pair Connection, RFC2217, Terminal, Reverse Telnet, Ethernet Modem, Printer, PPP, Disabled

**Secure:** Secure Real COM, Secure TCP Server, Secure TCP Client, Secure Pair Connection, SSH, Reverse SSH

### Applications

**Terminal Sessions:** 8 sessions per port

### Physical Characteristics

**Housing:** Metal

**Weight:**

NPort 6600-8: 3460 g

NPort 6600-16: 3580 g

NPort 6600-32: 3600g

**Dimensions:**

Without ears: 440 x 195 x 44 mm (17.32 x 7.68 x 1.73 in)

With ears: 480 x 195 x 44 mm (18.9 x 7.68 x 1.73 in)

### Environmental Limits

**Operating Temperature:**

Standard Models: 0 to 55°C (32 to 131°F)

Wide Temp. Models: -40 to 75°C (-40 to 167°F)

**Storage Temperature:** -40 to 75°C (-40 to 167°F)

**Ambient Relative Humidity:** 5 to 95% (non-condensing)

### Power Requirements

**Input Voltage:**

AC Models: 100 to 240 VAC

DC Models: ±48 VDC (20 to 72 VDC, -20 to -72 VDC)

**Power Consumption:**

AC Models: 285 mA @ 100 VAC, 190 mA @ 240 VAC

DC Models: 293 mA @ 48 VDC

**Alarm Contact:** Relay output with current carrying capacity of 1 A @ 24 VDC

**Power Line Protection:** 1 KV burst (EN 61000-4-4: EFT/B), 0.5 KV surge (EN 61000-4-5)

### Standards and Certifications

**Safety:** UL 60950-1, EN 60950-1

**EMC:** CE, FCC

**EMI:** EN 55022 Class A, FCC Part 15 Subpart B Class A

**EMS:**

EN 55024,

EN 61000-4-2 (ESD) Level 2/3,

EN 61000-4-3 (RS) Level 2,

EN 61000-4-4 (EFT) Level 2,

EN 61000-4-5 (Surge) Level 2,

EN 61000-4-6 (CS) Level 2,

EN 61000-4-8 Level 1,

EN 61000-4-11

**Freefall:** IEC-68-2-6, IEC-68-2-34, IEC-68-2-32

**Vibration:** IEC-68-2-6, IEC-68-2-34

**Green Product:** RoHS, CRoHS, WEEE

### Reliability

**Alert Tools:** Built-in buzzer and RTC (real-time clock)

**Automatic Reboot Trigger:** Built-in WDT (watchdog timer)

**MTBF (mean time between failures):**

NPort 6610-8: 135,891 hrs

NPort 6610-16: 102,373 hrs

NPort 6610-32: 68,707 hrs

NPort 6650-8: 135,370 hrs

NPort 6650-16: 101,783 hrs

NPort 6650-32: 68,177 hrs


### Warranty

**Warranty Period:** 5 years


**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

## Dimensions and Pin Assignment

Unit: mm (inch)

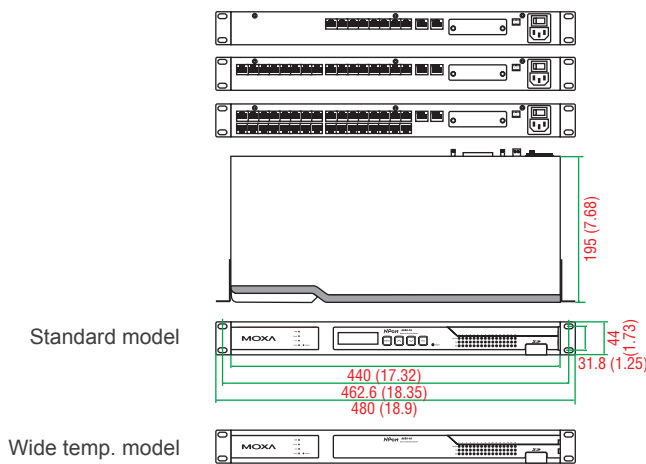

### 8-pin RJ45 connector



PIN	RS-232	RS-422/ 485-4W	RS-485-2w
1	DSR (in)	–	–
2	RTS (out)	TxD+	–
3	GND	GND	GND
4	TxD (out)	TxD-	–
5	RxD (in)	RxD+	Data+
6	DcD (in)	RxD-	Data-
7	CTS (in)	–	–
8	DTR (out)	–	–

## Ordering Information

### Available Models

**NPort 6610-8:** 8-port RS-232 to Ethernet secure terminal server, 100 to 240 VAC power input, 0 to 55°C operating temperature

**NPort 6610-8-48V:** 8-port RS-232 to Ethernet secure terminal server, ±48 VDC power input, 0 to 55°C operating temperature

**NPort 6610-16:** 16-port RS-232 to Ethernet secure terminal server, 100 to 240 VAC power input, 0 to 55°C operating temperature

**NPort 6610-16-48V:** 16-port RS-232 to Ethernet secure terminal server, ±48 VDC power input, 0 to 55°C operating temperature

**NPort 6610-32:** 32-port RS-232 to Ethernet secure terminal server, 100 to 240 VAC power input, 0 to 55°C operating temperature

**NPort 6610-32-48V:** 32-port RS-232 to Ethernet secure terminal server, ±48 VDC power input, 0 to 55°C operating temperature

**NPort 6650-8:** 8-port RS-232/422/485 to Ethernet secure terminal server, 100 to 240 VAC power input, 0 to 55°C operating temperature

**NPort 6650-8-48V:** 8-port RS-232/422/485 to Ethernet secure terminal server, ±48 VDC power input, 0 to 55°C operating temperature

**NPort 6650-16:** 16-port RS-232/422/485 to Ethernet secure terminal server, 100 to 240 VAC power input, 0 to 55°C operating temperature

**NPort 6650-16-48V:** 16-port RS-232/422/485 to Ethernet secure terminal server, ±48 VDC power input, 0 to 55°C operating temperature

**NPort 6650-32:** 32-port RS-232/422/485 to Ethernet secure terminal server, 100 to 240 VAC power input, 0 to 55°C operating temperature

**NPort 6650-32-48V:** 32-port RS-232/422/485 to Ethernet secure terminal server, ±48 VDC power input, 0 to 55°C operating temperature

**NPort 6650-8-T:** 8-port RS-232/422/485 to Ethernet secure terminal server, 100 to 240 VAC power input, -40 to 75°C operating temperature

**NPort 6650-16-T:** 16-port RS-232/422/485 to Ethernet secure terminal server, 100 to 240 VAC power input, -40 to 75°C operating temperature

### Optional Accessories (can be purchased separately)

**Serial Cables and Adaptors:** See Appendix A for details

### Package Checklist

- 1 NPort 6600 device server
- CBL-RJ45M9-150: 8-pin RJ45 to DB9 male connection cable, 150 cm
- Power cord (AC models only)
- 2 rackmount ears
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card

Expansion Modules			Use with the following NPort models					
			6150	6250	6450	6610-8 6650-8	6610-16 6650-16	6610-32 6650-32
NM-TX01 NM-TX01-T		1 10/100BaseT(X) port	–	–	✓	✓	✓	✓
NM-TX02 NM-TX02-T		2 10/100BaseT(X) ports	–	–	✓	✓	✓	✓
NM-FX01-S-SC NM-FX01-S-SC-T		1 100BaseFX port, single mode, SC connector	–	–	✓	✓	✓	✓
NM-FX01-M-SC NM-FX01-M-SC-T		1 100BaseFX port, multi mode, SC connector	–	–	✓	✓	✓	✓
NM-FX02-S-SC NM-FX02-S-SC-T		2 100BaseFX ports, single mode, SC connector	–	–	✓	✓	✓	✓
NM-FX02-M-SC NM-FX02-M-SC-T		2 100BaseFX ports, multi mode, SC connector	–	–	✓	✓	✓	✓
NM-Modem NM-Modem-T		1 PSTN modem port, RJ11 connector	–	–	✓	✓	✓	✓

Note: Expansion modules can be purchased separately.